


Bush Hog® RF15 Rotary Cutter

BUSH HOG® FEATURES

Suited to Tractors in the 50 to 90 HP Range
 10 Gauge Deck Construction
 7 Gauge Strongbacks
 1/4 Inch Sidebands
 Heavy Duty Wheel Hubs and Axle Spindles
 5 Year Gearbox Limited Warranty
 Powder Coat Paint

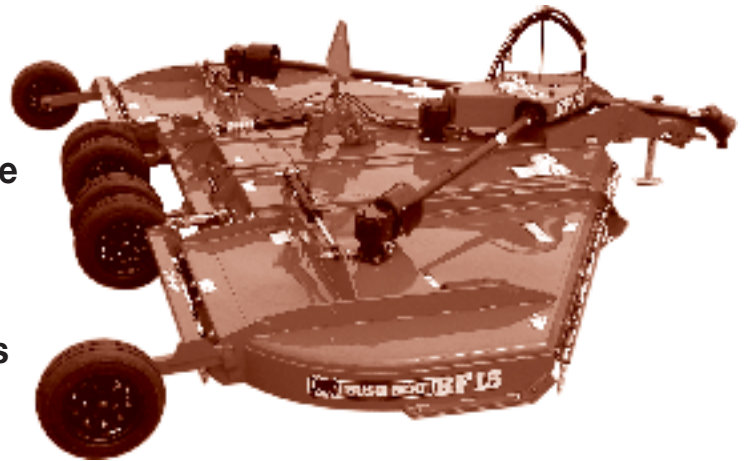

MODELS	RF15
Cutting Width	15 ft
Cutting Capacity	1 1/2 inch diameter
Cutting Height	2 to 13 inches
Overall Width x Length (from clevis to wheel hub at transport height)	12 ft 8 inches x 13 ft 3 inches
Transport Width (from weight box to wing skid)	8 ft
Tractor PTO	540 RPM
Minimum Tractor HP	50 PTO
Deck Thickness	Center: 11 gauge top, 7 gauge bottom, wings: 10 gauge
Side Bands	1/4 inch x 9 5/8 inches
Gearbox HP	160 – Transfer, 65 – Center, 65 – Wings
PTO Driveline	ASAE Cat. 4 (540 RPM)
Wing Driveline	ASAE Cat. 3
Wing Flex	90° Up/22° Down
Gearbox HP	160 – Transfer, 65 – Center, 65 – Wings
Slip Clutches	(3) 2 Plate Clutches
Blade Tip Speed	14,963 FPM
Blades	1/2 x 4 inches Uplift
Blade Holder	Crossbow™ Blade Carrier
Type Hitch	Self Leveling Hitch
Tires	Choice of Laminated Tire, Used Aircraft Tire
Axle Cushion	Spring Pod on Center Section
Wing Adjustment	Turnbuckles
Wing Hydraulics	Standard
Height Adjustment	Hydraulic, Standard
Deflectors, Safety	Front & Rear Rubber, or Front & Rear Chains
Warranty	1 year limited warranty with a 5 year gearbox limited warranty